
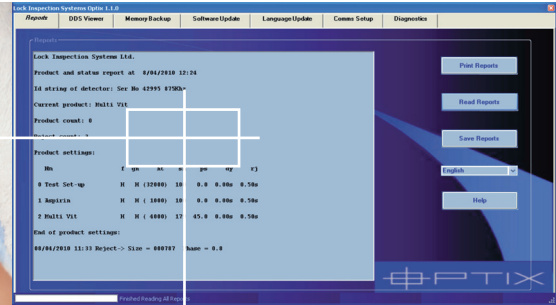
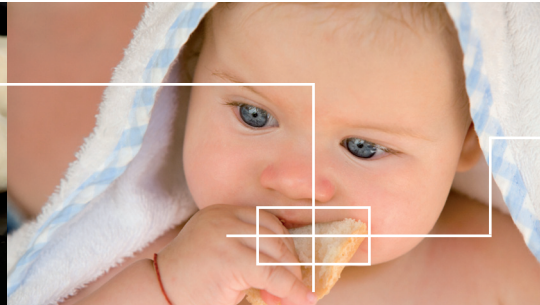


TECHNICAL DATA

INSIGHT HD

IN PURSUIT OF PURITY...

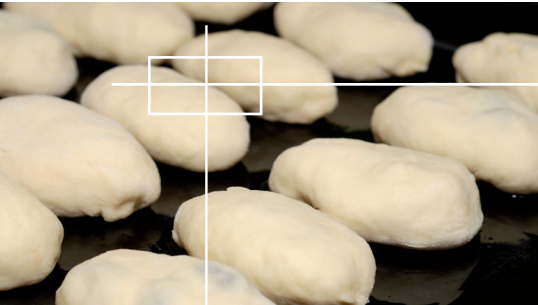

DDS (Direct Digital Signal)

Analyze
Detect
Report

- Integrated Digital Search Head and DDS vector display deliver perfect product setups
- Stable to extreme vibration and product signal
- Best in class sensitivity to magnetic and non magnetic metals
- External USB port
- Available with wired or wireless ethernet datalink port and SCADA capability
- Menu with unlimited language options
- User friendly operation with auto-learn feature
- Comprehensive choice of reject options including drop flap and retract band type
- Failsafe option comprises reject confirmation, air failure alarm and bin full alarm
- Available in single or multi-frequency format ranging from 30-875kHz
- INSIGHT HD detector heads are sealed to IP69k/PW12*

The INSIGHT HD range of metal detectors for the food and packaging industries sets new standards for good manufacturing practice - specifically - traceability, efficiency, product quality, and compliance with existing as well as forthcoming regulatory requirements.

To achieve these goals metal detection and signal processing take place in the compact INTEGRATED DIGITAL SEARCH HEAD. Sophisticated OPTIX detector management software uses Lock's unique DDS (Direct Digital Signal) vector diagram to generate the detailed product profile needed to achieve perfect product set-ups. This guarantees detection and rejection of metal fragments in both conductive and non-conductive product applications while achieving stable operation and market leading sensitivities to all metals.

Each INSIGHT HD is delivered with an external USB port to allow downloading of data for secure storage or distribution in pdf and other formats. Wired or wireless ethernet and SCADA capability are available.

Available in single or multi-frequency format ranging from 30 to 875kHz, the INSIGHT HDs compact dimensions make it suitable for integration with all well known checkweighers, and mounting onto new or existing conveyors.



TECHNICAL DATA

INSIGHT HD

IN PURSUIT OF PURITY...

Automatic Setup

Conductive products such as meat, dough and fish may require careful setup if optimum sensitivity is to be achieved in conjunction with high productivity. The INSIGHT HD will automatically setup and store 200 different presets, calibrating for bulk effect and packaging material as each product passes through the system.

Integrated Digital Search Head

- Metal detection, control and signal processing all take place within the ultra compact detector head
- Automatic balance control for adjustment-free operation
- User-replaceable electronic module for minimum downtime
- Full range of aperture sizes available to suit application
- Security Codes

Construction

- IP69K/PW12
- IP54/NEMA 12*

*Available in 30, 100 and 300kHz single frequency heads only

OPTIX Software

OPTIX is a powerful diagnostic and problem solving tool for engineers and operators. Functions available using OPTIX are:

- Reports
- Direct Digital Signal (DDS) Viewer
- Memory Backup
- Language and Software Update
- Diagnostics

General

- User friendly membrane or optional touchscreen HMI both feature unlimited language options and DDS (Direct Digital Signal) vector diagram display a view into the metal detector
- Automatic TEST SAMPLE prompt
- Permanent memory stores up to 8000 data events, which are retained when power is interrupted or disconnected
- Data reports can be downloaded to a standard memory stick for secure storage or distribution in pdf and other formats

Security Codes

Four password protected security levels are provided:

- L1: Operator level to change product types
- L2: Supervisor level to change setup mode
- L3: Engineering level to access factory setup parameters
- L4: Administration level to enable multi-user ID/password system

Communications

Every INSIGHT HD metal detector is available with wired or wireless ethernet connectivity and SCADA capability. The external USB port allows all events and product presets to be downloaded onto a standard memory stick or PC to enable secure storage and distribution of quality records in PDF or other formats.

Outputs

- Voltage-free relay contacts. Rating 240V, 3A resistive

Power Supply

- Universal power supply 88-264V AC 47-63Hz

Operating Environment

- Temperature: -10° to 60°C/14° to 140°F
- Humidity: up to 95% RH

Lock Inspection Systems Ltd

Lock House, Neville Street, Oldham, OL9 6LF, UK
Tel: +44 (0) 161 624 0333 Fax: +44 (0) 161 624 5181
Email: sales@lockinspection.co.uk

Lock Inspection Systèmes S.A.R.L.

Parc Silic, Bâtiment H, 12 avenue de Québec, Silic 620, Villebon, 91945 Courtaboeuf Cx, France
Tel: +33 (0) 169591620 Fax: +33 (0) 1 69 59 16 21
Email: sales@lockinspection.fr

Lock Inspection Systems Inc

207 Authority Drive, Fitchburg, MA 01420-6094, USA
Tel: +1 (0) 978 343 3716 / 800 227 5539
Fax: +1 (0) 978 343 6278
Email: sales@lockinspection.com

Lock Inspection Systems BV

Daalderweg 17, 4879 AX Etten-Leur, Nederland
Tel: +31 (0) 76 50 30 212 Fax: +31 (0) 76 50 89 800
Email: sales@lockbv.nl

Lock Inspection Systems (China Office)

Rm 1105, No 5 Building SIPPCC, 1111 Zhennan Road, Shanghai 200331, P.R.China
Tel: +86 (0) 21 6608 1980 Fax: +86 (0) 21 6608 1982
Email: sales@lockuk.cn

www.lockinspection.com